


## WNB 7

The combination of corrosion-resistant stainless steel, precise electronics and multiple temperature protection guarantees the highest level of safety in the laboratory.



On this page, you can find all the essential technical data on the Memmert water bath. Our customer relations team will be pleased to help if you want further information. If you should require a customised special solution, please contact our technical specialists at [sales@memmert.com](mailto:sales@memmert.com).

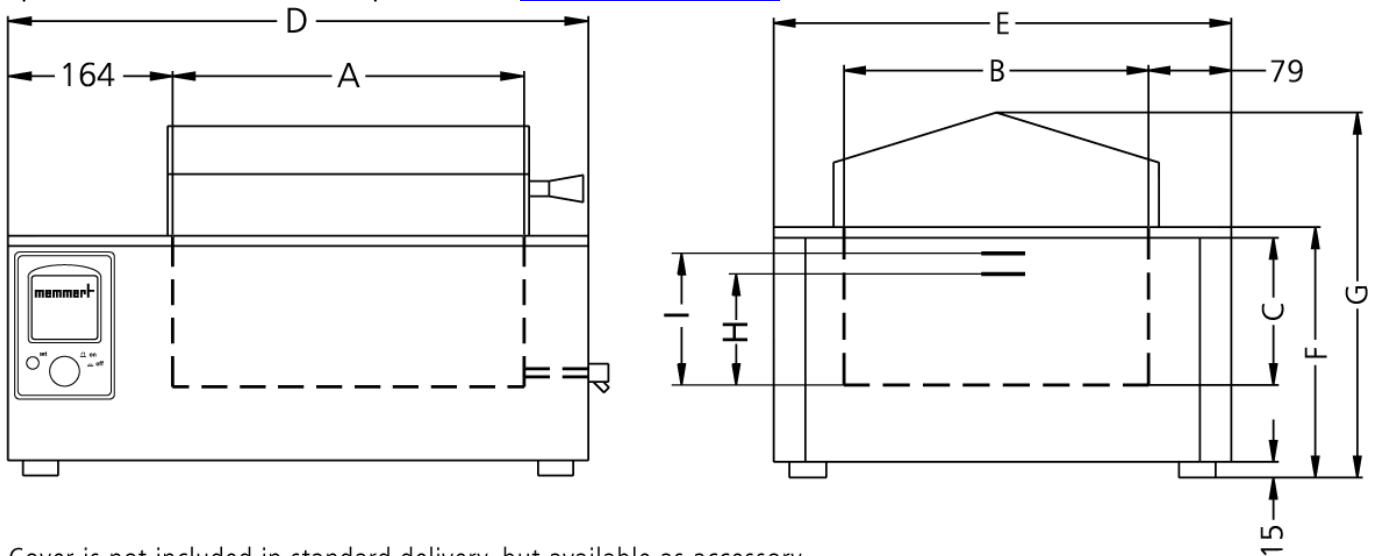

Cover is not included in standard delivery, but available as accessory.

## Temperature

<b>Setting temperature range</b>	+10 to +95 °C and boiling stage
<b>Working temperature range in °C</b>	min. 5 above ambient up to +95 °C with additional boiling mode

## Control of standard components

<b>Temperature sensor</b>	1 Pt100 sensor class A in 4-wire-circuit
<b>Timer</b>	integrated digital timer from 1 min. to 99,59 hours for:ON continuous operationWAIT (delayed on for continuous andlimited timed operation)HOLD

## Control technology

<b>Controller</b>	digital display of set and actual temperature and of (remaining) programme time
-------------------	---

## Safety

<b>Temperature control</b>	mechanical temperature limiter TB protectionclass 1 switching the heating off at approx. 30°Cabove max. temperature of the bath
<b>Temperature control</b>	in case of overtemperature due to failure,the heating is switched off at approx. 10°Cabove the set temperature (fixed value)
<b>Autodiagnostic system</b>	microprocessor PID-temperature controllerwith integrated autodiagnostic system withfault indicator

## Heating concept

<b>Heating Baths</b>	corrosion-proof large-area heating onthree sides
----------------------	--

## Stainless steel interior

<b>Dimensions</b>	$l_{(A)} \times w_{(B)} \times h_{(C)}$ : 240 x 210 x 140 mm
<b>Interior</b>	easy-to-clean interior, made of stainlesssteel, reinforced by deep drawn ribbing,material no. 1.4301 (ASTM 304), laser-welded
<b>Volume</b>	7 l
<b>Liquid level min.</b>	97 mm
<b>Liquid level max.</b>	120 mm

## Textured stainless steel casing

<b>Dimensions</b>	$w_{(D)} \times h_{(G)} \times d_{(E)}$ : 468 x 337 x 356 mm
-------------------	--

**Electrical data**

<b>Voltage</b>	230 V, 50/60 Hz
----------------	-----------------

<b>Electrical load</b>	approx. 1200 W (during heating)
------------------------	---------------------------------

**Ambient conditions**

<b>Installation</b>	The vent openings in the left and back side must remain unobstructed. The distance to the wall must be at least 100 mm on the sides and at least 150 mm to the rear. The minimum spacing from the top of the bath to the next ceiling is 750 mm.
---------------------	--

<b>Ambient temperature</b>	+5 °C to +40 °C
----------------------------	-----------------

<b>Humidity rh</b>	max. 80 %, non-condensing
--------------------	---------------------------

<b>Overvoltage category</b>	II
-----------------------------	----

<b>Pollution degree</b>	2
-------------------------	---

<b>Water bath</b>	
-------------------	--

**Packing/shipping data**

<b>Transport information</b>	The appliances must be transported upright
------------------------------	--

<b>Customs tariff number</b>	8419 8998
------------------------------	-----------

<b>Country of origin</b>	Federal Republic of Germany
--------------------------	-----------------------------

<b>WEEE-Reg.-No.</b>	DE 66812464
----------------------	-------------

<b>Dimensions approx incl. carton</b>	w x h x d: 570 x 450 x 420 mm
---------------------------------------	-------------------------------

<b>Net weight</b>	approx. 11 kg
-------------------	---------------

<b>Gross weight carton</b>	approx. 16 kg
----------------------------	---------------

**Standard units are safety-approved and bear the test marks**

